Figure 157.10d(c)(3)(ii) - Minimum Double Hull Dimensions
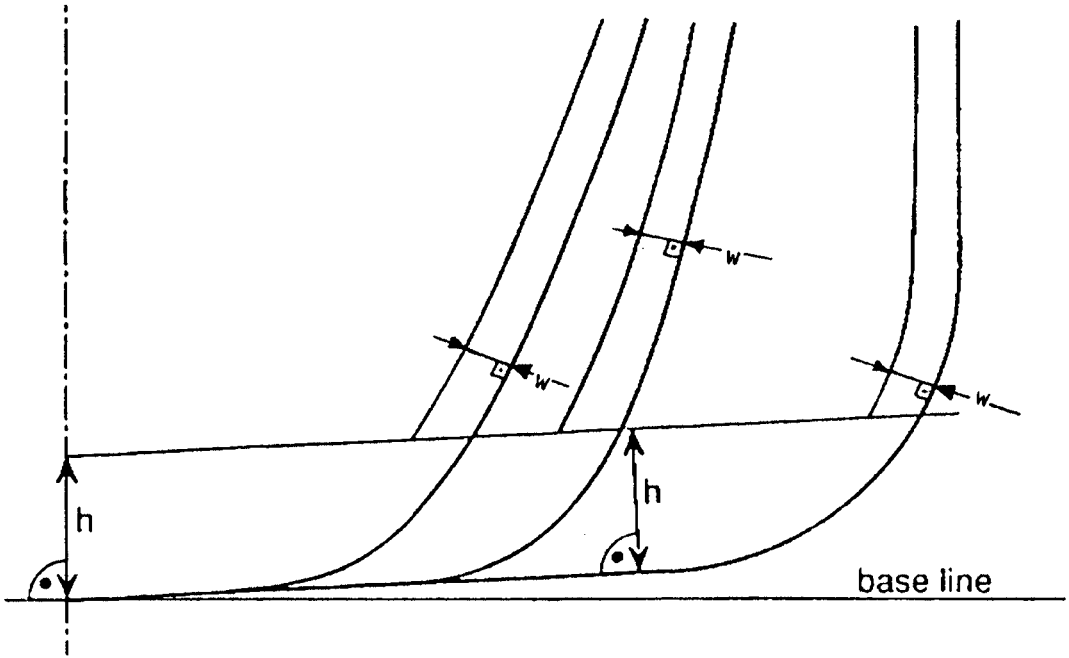
Within the Turn of the Bilge of Vessels Under 5,000 DWT