


Locate all required labeling in lower segment of one sidewall between maximum section width and bead so that data will not be obstructed by rim flange, unless maximum section width falls between the bead and one-fourth of the distance from the bead to the shoulder of the tire. For tires where the maximum section width falls in that area, locate all required labeling between the bead and the one-half the distance from the bead to the shoulder so that the data will not be obstructed by the rim flange.

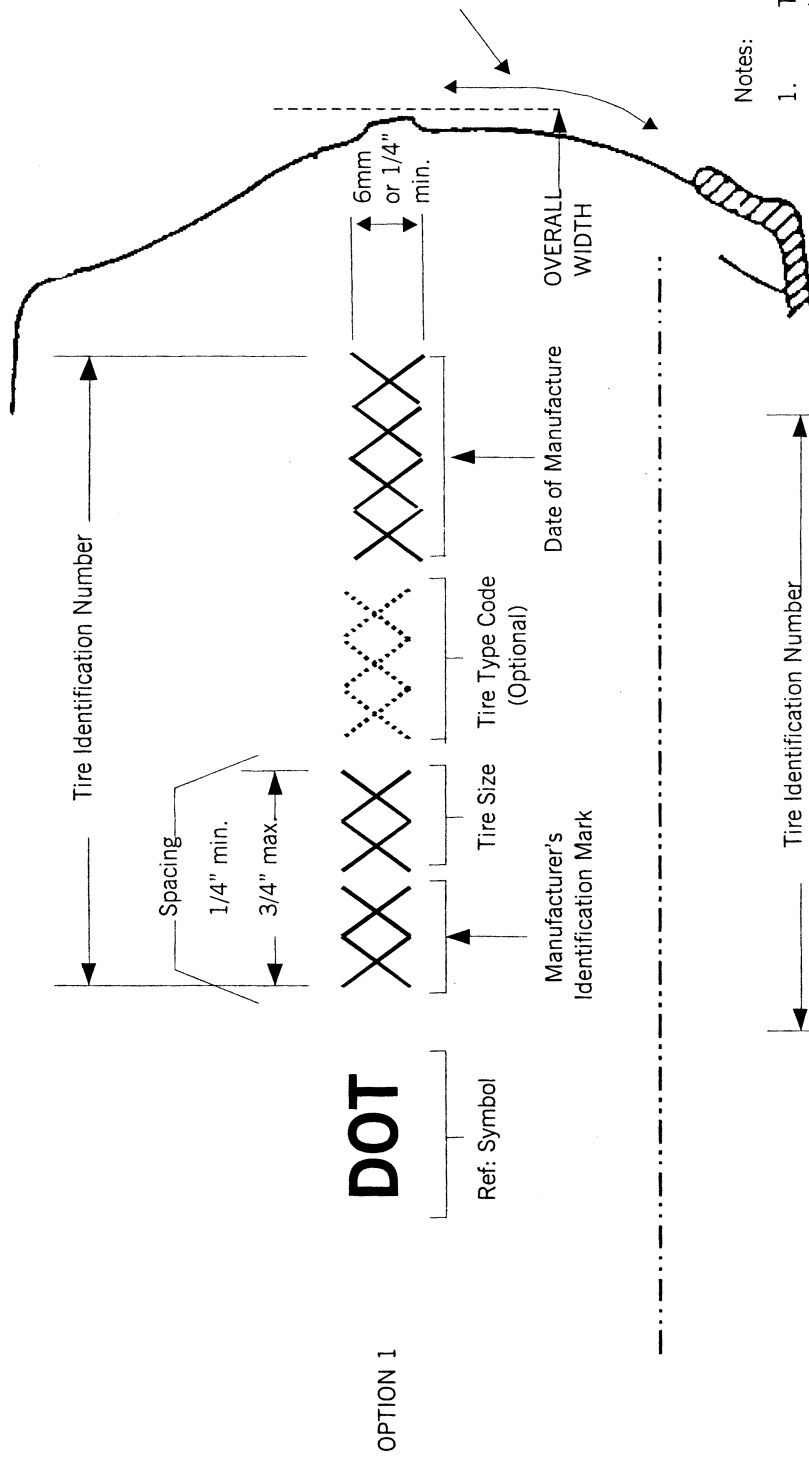


Notes:

1. Tire identification number shall be in "Futura Bold, Modified Condensed" or "Gothic" characters permanently molded (0.020 to 0.040") deep, measured from the surface immediately surrounding characters into or unto tire at indicated location on one side. (See note 4)
2. Groups of symbols in the identification number shall be in the order indicated, Deviation from the straight line arrangement shown will be permitted if required to conform to the curvature of the tire.
3. Other print type will be permitted if approved by the Administration.

OPTION 1

OPTION 2

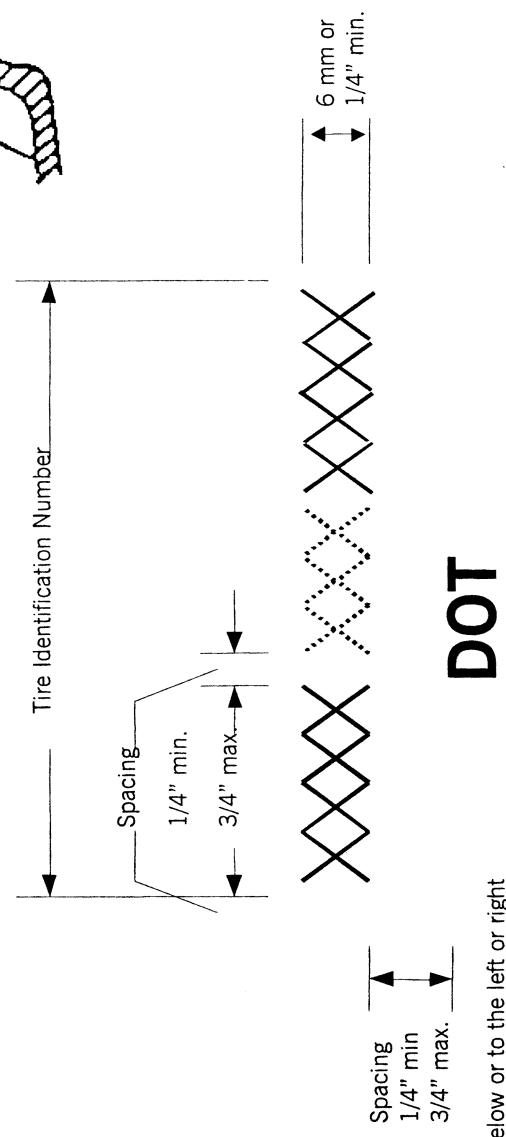

Above, below or to the left or right of Tire Identification number.

FIGURE 1: IDENTIFICATION NUMBER FOR NEW TIRES